

Product Specifications

Modular Fiber Optic Panel

KEY FEATURES

- Meets EIA/ECA-310-E mounting standards for 19 inches
- 1 RU design with 3 LGX slots accommodating 72 LC or 36 SC connectors
- Compatible with SIGNAMAX Zero-U Cable Management accessories offering front and rear strain relief
- Quick deployment solution in the field with an economic solution
- Integrated for optional cable management accessories including a fiber management tray




ORDERING INFORMATION

PART NO.	DESCRIPTION
RMF3-B	18 to 72-Fiber Rack-Mount Optical Fiber Panel

Adapter plates, optional cable management accessories, and splice trays sold separately.

CMB-550-M

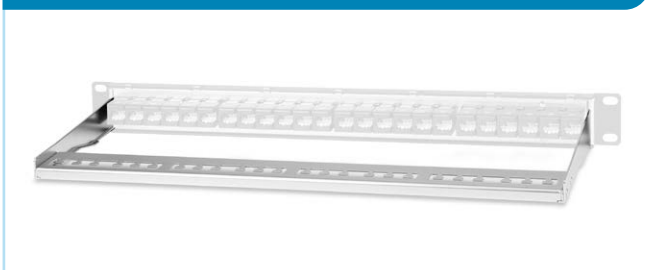

RMF-FMTA-B



SPECIFICATIONS

CONSTRUCTION

- Housing:** 1.5-mm CRS with corrosive resistant black finish
- Adapter Plate:** 1.5-mm aluminum with corrosive resistant black finish
- Adapter:** high-impact thermoplastic, UL94V-0 fire-retardant

DIMENSIONS

- RMF3-B:** 0.75" D x 19" W x 1.75" H (19.05 mm x 482.6 mm x 44.45 mm)
- Tray:** 10.0" D x 17.0" W x 1.75" H (254 mm x 428.6 mm x 44.45 mm)
- Bar:** 2.50" D x 19" W (63.5 mm x 482.6 mm)

CAPACITY

- Adapter Plates:
- RMF3-B: 3 max

ENVIRONMENTAL CONDITIONS

- Operation:** 14 °F to 140 °F (-10 °C to 60 °C)
- Storage:** -40 °F to 158 °F (-40 °C to 70 °C)
- Operating RH:** 93% Max (non-condensing)

WARRANTY

- 5 - Year Limited Component

Product Specifications

Modular Fiber Optic Panel

UFE-B-[AA]LC[B]-[C]

ORDERING CONFIGURATION - LC CONNECTOR

FIBER COUNT [AA]	TYPE [B]*	FIBER TYPE [C]
06: 12 Fiber, 6 Duplex	NONE: UPC	NONE: OM1/OM2
08: 16 Fiber, 8 Duplex	A: APC	G: OM3
12: 24 Fiber, 6 Quadruplex	* APC only available for SM connectors	V: OM4
		C: SM

ADAPTER PLATE OPTIONS



UFE-B-[AA]SC[B]-[C]

ORDERING CONFIGURATION - SC CONNECTOR

FIBER COUNT [AA]	TYPE [B]*	FIBER TYPE [C]
06: 6 Fiber, 6 Simplex	NONE: UPC	NONE: OM1/OM2
08: 8 Fiber, 8 Simplex	A: APC	G: OM3
12: 12 Fiber, 6 Duplex	* APC only available for SM connectors	V: OM4
		C: SM

ADAPTER PLATE OPTIONS



KEEPING YOUR WORLD CONNECTED